

Operates with 12VDC or 24VDC systems

Three Configurable Levels of Passcode Protection

Flexible Input Sensor Types For the Analog Inputs

Analog Inputs Can Be Used as Digital Ground Inputs



POWERFUL, CONFIGURABLE CONTROLLER FOR MECHANICAL AND ELECTRONIC ENGINES

The Murphy PowerCore® MPC-10 Controller is an all-purpose manual/auto-start and manual/auto-throttling engine controller designed with rental applications in mind. This powerful controller is targeted for engine-driven pumps and irrigation, with the versatility to work in most engine-driven applications.

The MPC-10 supports J1939 CAN protocols for electronically governed engines as well as I/O for mechanical engines for fault and safety shutdowns.

The MPC-10 also provides three levels of menu security which can easily be set with the free PC configuration tool.

AVAILABLE AS A PANEL SOLUTION



Murphy's ML1000 control panel incorporates all the power and functionality of the PowerCore® MPC-10 in a panel solution for most any engine-driven application.


FOR MORE INFORMATION ABOUT ML1000, VISIT:
ENOVATIONCONTROLS.COM/ML1000

POWERCORE® MPC-10

1511730 06-2019

MPC-10 DIMENSIONS

Please visit our Help Center for ML1000 dimensions

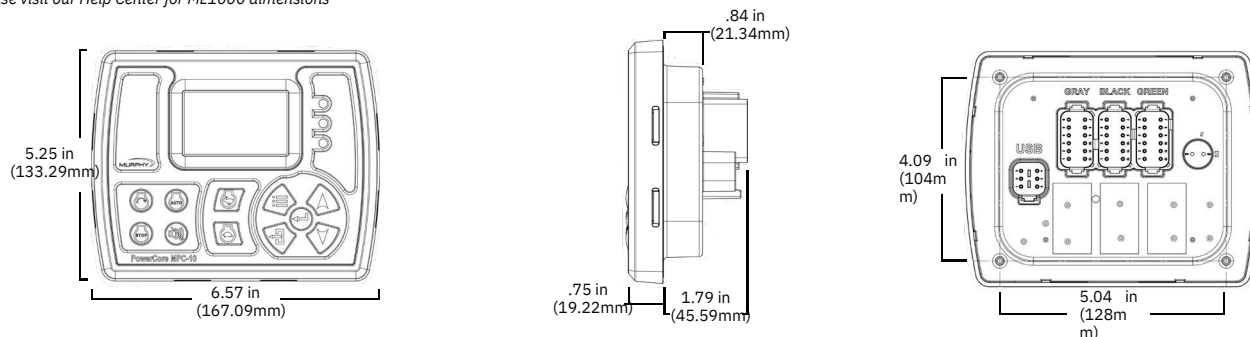

MPC-10 SPECIFICATIONS

DISPLAY	
SCREEN SIZE	2.7 inches
TYPE	WQVGA Monochrome HR-TFT
RESOLUTION	400 x 240
HARDWARE	
KEYPA	11 tactile feedback buttons
D LEDs	(3) Red Shutdown, Amber Warning, Green Auto Mode or Running Loaded State
MATING CONNECTORS	Deutsch W125-P012 locking wedges Gray DT06-12SA-P012 Black DT06-12SB-P012 Green DT06-12SC-P012
COMMUNICATION	
CAN	(1) CAN 2.0B, J1939
SERIAL	RS485, (MODBUS) RTU
USB	2.0B for Programming
ELECTRICAL	
OPERATING VOLTAGE	8-32 VDC, reverse battery polarity and load dump
TOTAL CURRENT CONSUMPTION	protected Power on in stopped state: 117 mA at 12 VDC Power on in standby mode: 52 mA at 12 VDC
CRANKING POWER HOLDUP	0 VDC up to 50mS

INPUTS	(5) Digital, configurable (high/low) (3) Analog, configurable (Resistive 4-20mA, 0-5V, or Digital Low) (1) Frequency, supporting Magnetic pickup (30Hz - 10kHz, 2.0VAC-120VAC) and Engine Alternator (30Hz - 10kHz, 4.5 VRMS - 90 VRMS)
OUTPUTS	(3) Relays: 10A, SPDT, Form C (30 VDC @ 10A max.), 30A max aggregate @ 85C (2) Low-side (1A) (2) High-side (1A) (1) Dedicated Alternator Excite (provides Charge Fail Fault if unable to excite alternator)
ENVIRONMENTAL	
OPERATING	-40°C to +85°C (-40°F to 185°F)
TEMPERATURE STORAGE	-40°C to +85°C (-40°F to 185°F)
TEMPERATURE	IP67 and IP69K front and back, IP66 panel seal with accessory gasket
PROTECTION	Random, 7.86 Grms (5-2000Hz), 3 axes (X,Y,Z)
VIBRATION	±50G in 3 axes (X,Y,Z)
SHOCK	SAE J1113
EMC/EMI	Polycarbonate/ABS
CASE	Width: 6.57 in. (167 mm) Height: 5.25 in. (133 mm) Depth: 2.55 in. (64 mm)
DIMENSIONS	

ML1000 SPECIFICATIONS

HARDWARE	
CONNECTORS	21-way & 31-way Deutsch HDP26-24 series

⚠ **WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov

FOR MODEL & PART INFORMATION

FOR MANUAL & SUPPORT DOCUMENTS

FOR SUPPORT & WARRANTY

ENOVATIONCONTROLS.COM/MPC-10 &
ENOVATIONCONTROLS.COM/ML1000

SUPPORT.ENOVATIONCONTROLS.COM

ENOVATIONCONTROLS.COM/SUPPORT

SALES CONTACT

ENOVATION
CONTROLS®

CONTACT

✉ sales@rajkotmarinelc.ae
☎ +971 6 7487580
🌐 www.rajkotmarine.com

RAJKOT MARINE LLC

Jarf Industrial Area 1,
P.O Box 5861
Ajman, UAE

