

Optically-bonded 5-inch LCD  
designed for harsh environments

High-brightness screen for full  
sunlight viewability

Glass display surface offers  
enhanced clarity and strength

Glove-friendly touch panel



## FEATURE-RICH GLASS-FRONT DISPLAY BRINGS RUGGED PERFORMANCE FOR SMALL FOOTPRINTS

For rugged applications without a lot of space, The PV500 is available with a glass-front, with a the PowerView 500 is the perfect fit. With a 5-inch glove-friendly touchscreen and non-touchscreen LCD screen, operators can get the full view of their models to suit the needs of your application. equipment on a single all-weather display.

Perfect for all kinds of vehicles and equipment, the PV500 is easily viewed in full sunlight and contains an optically-bonded high-bright LCD inside its IP67-rated case to keep it safe in all weather environments.

Equipped with a high-speed processor, the PV500 delivers high-quality graphics and animations for a rich user experience.

### BUILT FOR POWERVISION

PowerVision Configuration Studio® software lets programmers design stunning user interfaces, create intelligent applications with scripting and prototype quickly with a vast library of standard engine parameters.




**IP  
67**

# POWerview® 500

1900001 04-2022

## DIMENSIONS

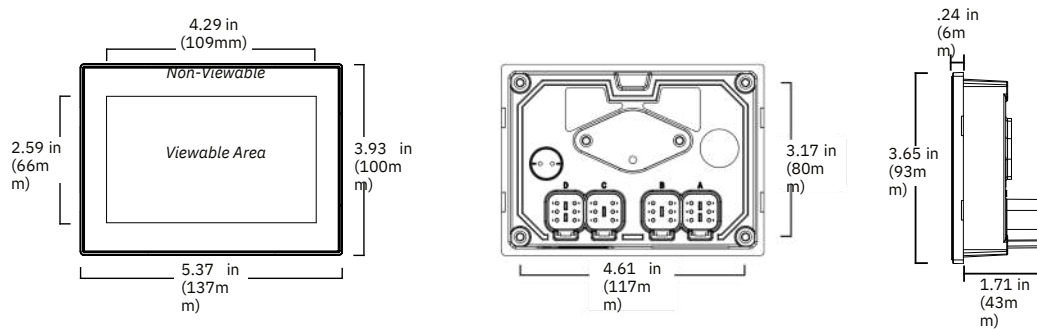

## PRODUCT SPECIFICATIONS

COMPUTING	
<b>PROCESSOR</b>	Renesas® RZ/G1E Arm® Cortex®-A7 dual-core processor @ 1.0 GHz
<b>OPERATING SYSTEM</b>	QNX® Realtime Operating System
<b>STORAGE</b>	8 GB flash memory
<b>RAM</b>	256 MB DDR3-SDRAM
DISPLAY	
<b>DISPLAY AREA</b>	5" (108mm [H] x 64.8mm [V])
<b>TYPE</b>	LVDS TFT LCD with LED backlight, 24-bit
<b>RESOLUTION</b>	color 800 x 480 (WVGA)
<b>CONTRAST RATIO</b>	Typ. 1000:1
<b>BRIGHTNESS</b>	900 cd/m² (900 nits)
<b>SURFACE</b>	Anti-glare
<b>TOUCH PANEL</b>	Projected capacitive (PCAP) with glove touch
HARDWARE	
<b>REAL TIME CLOCK</b>	Li-Ion battery backup (Typ. lifespan 10 years) non-rechargeable, non-replaceable
<b>CONNECTORS</b>	(4) 6-position DEUTSCH® style DT series
<b>VIDEO INPUTS</b>	(2) NTSC/PAL (single channel viewable)

COMMUNICATION	
<b>CAN</b>	(2) CAN 2.0B according to ISO-11898-2; J1939 and proprietary messaging
<b>SERIAL</b>	(1) RS-485 MODBUS Master/Slave Port
<b>USB</b>	USB 2.0 full speed host
ELECTRICAL	
<b>OPERATING VOLTAGE</b>	6 – 36 VDC, reverse polarity protected Min current draw @ 24V: 0.202A Max current draw @ 24V: 0.297A Min current draw @ 12V: 0.318A Max current draw @ 12V: 0.438A
<b>INPUTS</b>	(1) Analog 0–5 VDC, 4–20 mA, resistive, 10-bit resolution (1) Discrete digital, active-high
<b>OUTPUTS</b>	(2) 500 mA switched low-side
ENVIRONMENTAL	
<b>OPERATING TEMPERATURE</b>	-30°C to +85°C (-22°F to +185°F)
<b>STORAGE TEMPERATURE</b>	-40°C to +85°C (-40°F to +185°F)
<b>PROTECTION</b>	IP66 and IP67, front and back, for outdoor use
<b>VIBRATION</b>	Random vibration, 8.17 Grms (5–2000Hz), 3 axes
<b>SHOCK</b>	±50G in 3 axes
<b>EMC/EMI</b>	SAE J1113, ISO 13766, CE per 2014/30/EU

**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**FOR MODEL & PART INFORMATION**

**FOR MANUAL & SUPPORT DOCUMENTS**

**FOR SUPPORT & WARRANTY**

[ENOVATIONCONTROLS.COM/PV500](http://ENOVATIONCONTROLS.COM/PV500)

[SUPPORT.ENOVATIONCONTROLS.COM](http://SUPPORT.ENOVATIONCONTROLS.COM)

[ENOVATIONCONTROLS.COM/SUPPORT](http://ENOVATIONCONTROLS.COM/SUPPORT)

## SALES CONTACT



### CONTACT

✉ [sales@rajkotmarinellc.ae](mailto:sales@rajkotmarinellc.ae)  
☎ +971 6 7487580  
🌐 [www.rajkotmarine.com](http://www.rajkotmarine.com)

### RAJKOT MARINE LLC

Jerf Industrial Area 1,  
P.O Box 5861  
Ajman, UAE

